

FD600-111G-HZ600 EPON ONU



Overview

FD600-111G-HZ600 EPON ONT is one of the EPON optical network unit design to meet the requirement of the broadband access network. It apply in FTTH/FTTO to provide the data and video service based on the EPON network.

EPON is the latest generations of access network technology. IEEE802.3ah is the standard protocol of EPON. The EPON standard differs from other PON standards in that it achieves higher bandwidth and higher efficiency using larger, variable-length packets. EPON offers efficient packaging of user traffic, with frame segmentation allowing higher quality of service (QOS) for delay-sensitive voice and video communications traffic. EPON networks provides the reliability and performance expected for business services and provides an attractive way to deliver residential services. EPON enables Fiber To The Home (FTTH) deployments economically resulting to accelerated growth worldwide.


FD600-111G-HZ600 is based on ZTE high-performance xPON access chip. The chip supposes three mode : GPON/EPON/P2P, comply with 802.3-2005, CTC EPON equipment technical requirements, have good xPON interoperability compatibility.

FD600-111G-HZ600 provide one GE auto-adapting Ethernet ports. The FD600-111G-HZ600 features high-performance forwarding capabilities to ensure excellent experience with Internet and HD video services. Therefore, the FD600-111G-HZ600 provides a perfect terminal solution and future-oriented service supporting capabilities for FTTH deployment. It has good third-party compatibility to work with the third party OLT, such as Huawei/ZTE/Fiberhome/Alcatel-Lucent.

Features

- Full compatible with IEEE802.3ah Standard
- Support port-based rate limitation and bandwidth control
- Up to 20KM transmission Distance

- Support data encryption, group broadcasting, etc.
- Support Dynamic Bandwidth Allocation (DBA)
- Support ONU auto-discovery/Link detection/remote upgrade of software;
- Support power-off alarm function ,easy for link problem detection
- Support broadcasting storm resistance function
- Support port isolation between different ports
- Support three layer routing functions
- Support ACL to configure data packet filter flexibly
- Specialized design for system breakdown prevention to maintain stable system
- Support software online upgrading
- EMS network management based on SNMP ,convenient for maintenance

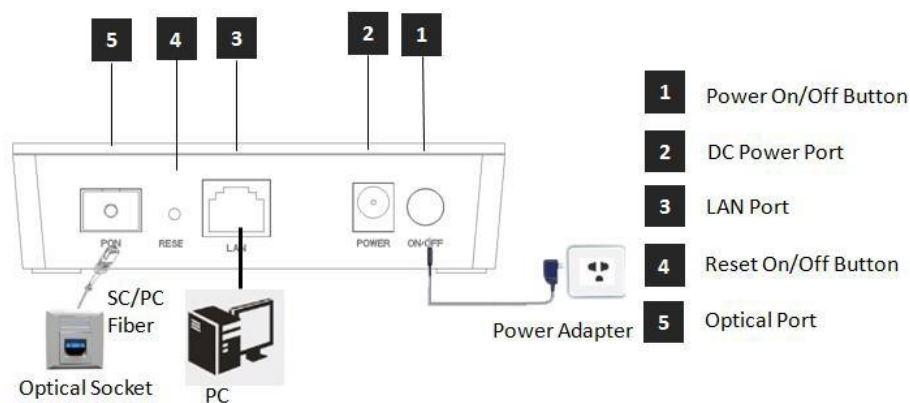

Indicator		Description
1	LAN	LAN port status On: Ethernet connection is normal; Blinking: Data is being transmitted through the Ethernet port; Off: Ethernet connection is not set up;
2	LOS	EPON optical signals On: Optical power lower than receiver sensitivity ; Off: Optical in normal
3	PON	ONU Register On: Success to register to OLT; Blinking: In process of registering to OLT; Off: In process of registering to OLT;
4	PWR	Power status On: The ONT is power on; Off: The ONT is Power off;

Specification

Item	Parameters	Specification
Interface	PON Port	1 EPON optical interface Meet 1000BASE-PX20+ standard Symmetric 1.25Gbps upstream/downstream SC single-mode fiber split ratio: 1:64 Transmission distance 20KM
	Ethernet Port(LAN)	1*GE Auto-negotiation RJ45 ports Full Duplex / Half-Duplex RJ45, Auto-MDI/MDI-X Transmission Distance 100 Meter
Management	Power Supply Port	12V DC input
	Network Management	Support IEEE802.3 QAM, ONU can be remotely managed by OLT Support Remote management through SNMP and Telnet Local management
	Management Function	Status monitor, Configuration management, Alarm management, Log management
Environmental Specifications	Shell	Plastic casing
	Power	External 12V 0.5A DC power supply adapter Power consumption: <3W
	Dimensions	110mm(L) x70mm(W) x30mm (H) 0.1kg
	Environment	Operating Temperature: 0~50℃ Storage Temperature: -40~85℃ Operating Humidity: 10%~90%(Non-condensing) Storage Humidity: 10%~90%(Non-condensing)

Application

- ✧ Solution: FTTH
- ✧ Business: Broadband Internet、IPTV、VOD、IP Camera

Network Construction



Figure: FD600-111G-HZ600 Application Diagram

Ordering information

Product Name	Product Model	Descriptions
EPON ONU	FD600-111G-HZ600	1*GE Ethernet interface, 1 EPON interface, plastic casing, external power supply adapter